
dual pumps

# M500-1021

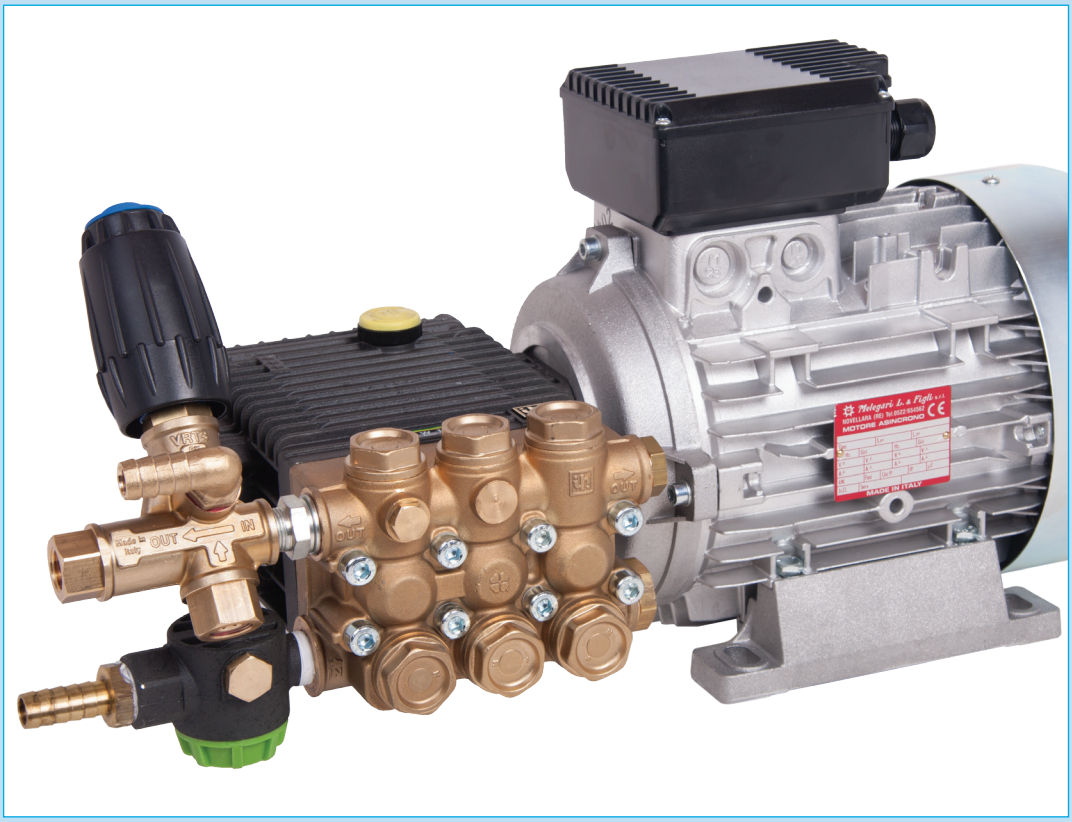


| 9.5 Lpm | 130 Bar | 240 Volt | 3 Hp |
|---|---|---|---|


# M500-1021

| 9.5 | 130 |
|---|---|
| Lpm | Bar |





Interpump
44 Series



Hollow shaft motor
Direct mount

| Motor | |
|---|---|
| **Voltage** | 240 Volts - 50 Hz |
| **Power** | 3.0 Hp - 2.2 Kw |
| **Speed** | 1450 Rpm - 4 pole |
| **Frame** | IEC 100L frame - B3 foot mount |
| **Face size** | B14C face |
| **Material** | Die cast aluminium housing |

| Drive & Mounting | |
|---|---|
| **Motor Shaft** | 24mm hollow |
| **Pump Shaft** | 24mm male |
| **Mounting** | Direct drive |

| Pump | |
|---|---|
| **Make** | Interpump 44 series |
| **Model** | W130M |
| **Flow** | 9.5 Lpm |
| **Pressure** | 130 Bar - 1885 Psi |
| **Max temp** | 60°C |
| **Materials** | Brass manifold |
| **Inlet** | 1/2" Hose barb |
| **Outlet** | 3/8" BSP female |
| **Bypass** | 15mm hose barb |
| **Overall Weight & Dimensions** | |
| 30Kg - 475L x 255W x 260H mm | |

Dealer Stamp