
dual pumps

M500-1051

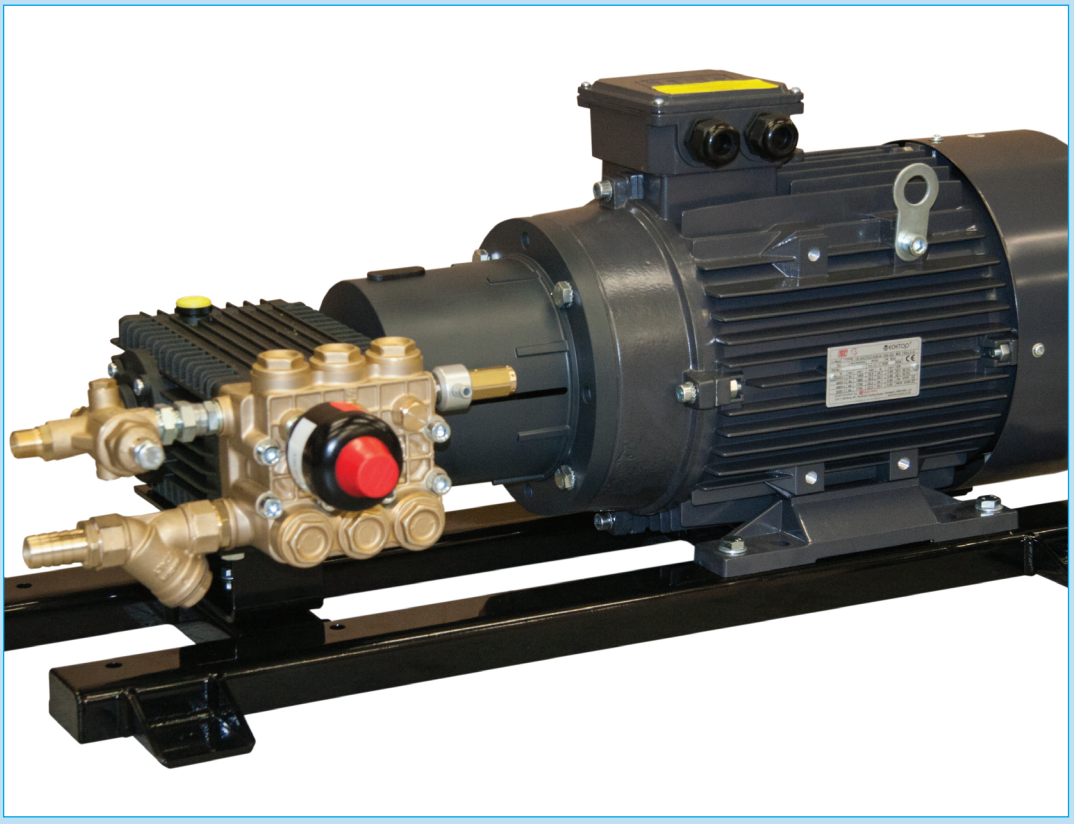


41 Lpm	210 Bar	415 Volt	25 Hp

M500-1051

41	210
Lpm	Bar



Vibroflex Coupling



Interpump 66 Series



Spider Coupling

Motor	
Voltage	415 Volts - 50 Hz
Power	25 Hp - 18 Kw
Speed	1450 Rpm - 4 pole
Frame	IEC 160L frame - B3 foot mount
Face size	B14C face
Material	Die cast aluminium housing

Pump & Performance	
Make & Model	Interpump 66 series - W2141
Flow	41 Lpm
Pressure	210 Bar - 3045 Psi
Max temp	60°C
Materials	Forged brass manifold


Drive & Mounting	
Motor Shaft	42mm male
Pump Shaft	24mm male
Mounting	Spider drive coupling & flange

Dimensions & Port Sizes	
Overall dimensions	149Kg - 970L x 490W x 440H mm
Filter inlet	1" hose barb
Valve outlet	1/2" BSP male thread
Bypass	1/2" hose barb

M500-1051 Principle Components



1 Interpump K1 Unloader Valve



2 Interpump S284 Safety Valve



3 Brass Inlet Filter



4 Pulsation Dampener