

1720/1740/1745 SERIES INLET STRAINERS | FOR INTERNATIONAL & US MARKETS



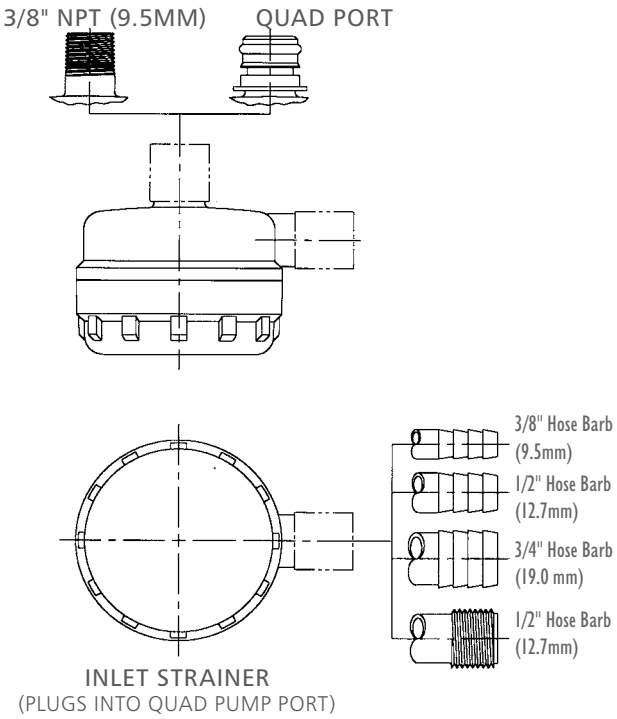

INLET STRAINER
(PLUGS INTO QUAD PUMP PORT)

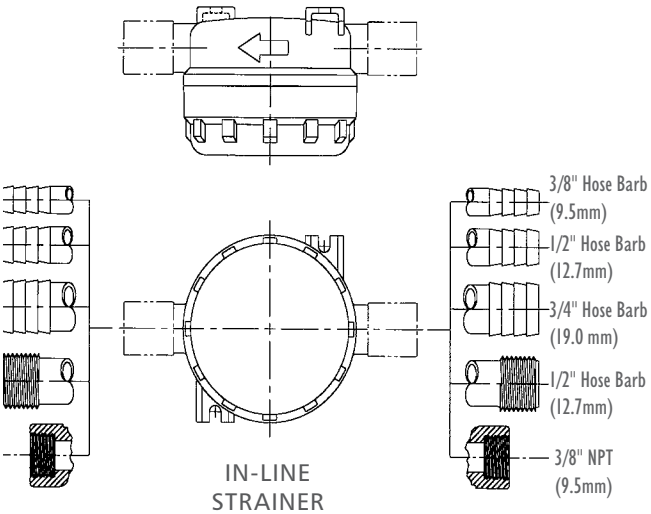

IN-LINE
STRAINER

FEATURES

- Low profile design for space saving installation.
- Very strong reinforced plastic base with clear cover.
- Wide variety of port configurations from 3/4" (19.4=1mm) to 3/8" (9.5mm).

SPECIFICATIONS

Materials	Base	Polypropylene, black
	Cover	Polysulfane, smoke tinted
	Screen	Stainless Steel, 20 and 40 mesh Polypropylene Screen, 20 mesh
	O-rings	Buna-N FDA Compound
Temperature	160°F (70°C) max.	
Dimensions	2.75" (70 mm) diameter x 2.25" (57 mm) high 4.75" (121 mm) max. port to port (3/4" hose barb) Plug-in style, 3.75" (96 mm) max. length	

INST. SHEET #12345-000

MODELS

MODEL #	DESCRIPTION
01720-000	3/4" (19.0mm) x 3/4" (19.0mm) hose barb SS 20m
01720-002	1/2" (12.7mm) x 1/2" (12.7mm) hose barb SS 20m
01720-023	3/8" (9.5mm) hb x 3/8" (9.5mm) NPT (m) 90° SS 20m
01720-102	1/2" (12.7mm) x 1/2" (12.7mm) hose barb PP 20m
01720-103	3/8" (9.5mm) x 3/8" (9.5mm) hose barb PP 20m
01720-112	1/2" (12.7mm) x Quad port 90° PP 20m
01720-123	3/8" (9.5mm) hb x 3/8" (9.5mm) NPT (m) 90° PP 20m
01720-375	3/8" (9.5mm) NPT(f) x 3/8" (9.5mm) NPT(f) SS 20m
01740-000	3/4" (19.0mm) x 3/4" (19.0mm) hose barb SS 40m
01740-002	1/2" (12.7mm) x 1/2" (12.7mm) hose barb SS 40m
01740-003	3/8" (9.5mm) x 3/8" (9.5mm) hose barb SS 40m
01740-004	1/2" (12.7mm) x 1/2" (12.7mm) SS 40m
01740-010	3/4" (19.0mm) x Quad port 90° SS 40m
01740-012	1/2" (12.7mm) x Quad port 90° SS 40m
01740-014	1/2" (12.7mm) x Quad port 90° SS 40m
01740-375	3/8" (9.5mm) NPT(f) x 3/8" (9.5mm) NPT(f) SS 40m
017450-00S	Strainer In-line 3/4" (19.0mm) HB X 3/4" (19.0mm) HB SS 40M PETG VIT
017450-10S	Strainer In-line 3/4" (19.0mm) HB X QUAD PORT 90 ° 40M PETG VIT
017450-12S	Strainer In-Line 1/2" (12.7mm) HB X QUAD PORT 90 ° 40M PETG VIT
017450- 23S	Strainer In-Line 3/8" (9.5mm) HB X 3/8" (9.5mm) MNPT SS 40M PETG VIT

SS - Stainless Steel PP - Polypropylene m - Mesh