
Hydraulically-Driven, Cast Iron & Stainless Steel

Series 9303C and 9303S

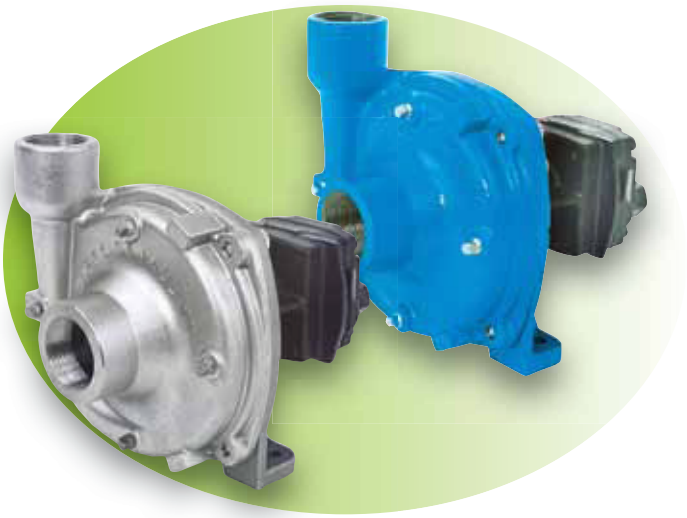

- Available in cast iron and 316 stainless steel
- Hydraulic motor drive (for open center, closed center and load-sensing systems)
- Port sizes: 1½" NPT inlet, 1¼" NPT outlet
- 220 x 200 universal flange available (U)
- Max. fluid temperature: 140°F/60°C
- Impeller: Cast Iron models – Nylon; (GTX available)
  Stainless Steel models – Polypropylene
- Motor: internal gear gerotor
- Hydraulic ports: ½" NPT inlet, ¾" NPT outlet
- Weight: 26 lbs./11.8 kg
- Pump seals: Cast Iron models – Viton/ceramic standard; Life Guard® silicon carbide (B) and Buna-N ceramic available; Stainless Steel models – Life Guard® silicon carbide standard
- Hydraulic motor seal: double-lip Teflon
- Max. motor psi: 3000

Order Information

Model Number	Max GPM	Max PSI	Max Hyd. GPM	Hydraulic Selection System
9303C-HM1C*	114	130	13 GPM	Open/Closed
9303C-HM2C*	97	95	6 GPM	Closed
9303C-HM3C*	125	98	24 GPM	Large open
9303C-HM4C*	115	93	7 GPM	Open/Closed
9303C-HM5C*	147	145	16 GPM	Open/Closed
9303S-HM1C	114	130	13 GPM	Open/Closed
9303S-HM2C	97	95	6 GPM	Open/Closed
9303S-HM3C	125	98	24 GPM	Open/Closed
9303S-HM4C	115	93	7 GPM	Open/Closed
9303S-HM5C	147	145	16 GPM	Open/Closed
3430-0332	Seal and o-ring repair kit			
3430-0589	Life Guard® silicon carbide seal kit			

* Universal Flange (220 x 200) - Add Suffix "U" (i.e.: 9303C-HM3C-U)
Life Guard® silicon carbide seal - Add suffix "B" (i.e.: 9303C-HM1C-B)

9303C-HM1C, 9303S-HM1C — U.S. Units

Hyd. Flow GPM	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI
11	104	101	96	90	82	71	60	47	31		
12	110	109	107	105	101	92	81	67	53	36	9
13	112	111	109	107	104	102	96	85	76	63	33

9303C-HM1C, 9303S-HM1C — Metric Units

Hyd. Flow LPM	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR
41.6	394	382	363	341	310	269	227	178	117		
45.4	416	413	405	397	382	348	307	254	201	136	34
49.2	424	420	413	405	394	386	363	322	288	238	125

9303C-HM2C, 9303S-HM2C — U.S. Units

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
4	70	60	45	25					
5	83	74	65	50	37	22	4		
6	94	86	80	72	62	50	37	22	7

9303C-HM2C, 9303S-HM2C — Metric Units

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
15.1	265	227	170	95					
18.9	314	280	246	189	140	83	15		
22.7	356	326	303	273	235	189	140	83	26

9303C-HM3C, 9303S-HM3C — U.S. Units

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
15	100	92	83	69	47				
18	116	114	108	100	90	76	55	33	
20	125	123	120	114	107	96	85	71	50

9303C-HM3C, 9303S-HM3C — Metric Units

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
56.8	379	348	314	261	178				
68.1	439	432	409	379	341	288	208	125	
75.7	473	466	454	432	405	363	322	269	189

9303C-HM4C, 9303S-HM4C — U.S. Units

Hyd. Flow GPM	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI
5	84	76	66	52	34				
6	97	92	86	78	67	50	25		
7	110	104	98	91	82	69	55	38	14

9303C-HM4C, 9303S-HM4C — Metric Units

Hyd. Flow LPM	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR
18.9	318	288	250	197	129				
22.7	367	348	326	295	254	189	95		
26.5	416	394	371	344	310	261	208	144	53

9303C-HM5C, 9303S-HM5C — U.S. Units

Hyd. Flow GPM	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 70 PSI	GPM at 80 PSI	GPM at 90 PSI	GPM at 100 PSI	GPM at 110 PSI	GPM at 120 PSI	GPM at 130 PSI
13	113	105	97	86	73	59	44				
14	128	123	116	108	98	88	74	61	44		
15	135	132	126	119	110	100	89	77	66	50	20
16	145	142	137	132	126	117	107	95	83	70	55

9303C-HM5C, 9303S-HM5C — Metric Units

Hyd. Flow LPM	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.8 BAR	LPM at 5.5 BAR	LPM at 6.2 BAR	LPM at 6.9 BAR	LPM at 7.6 BAR	LPM at 8.3 BAR	LPM at 9.0 BAR
49.2	428	397	367	326	276	223	167				
53.0	485	466	439	409	371	333	280	231	167		
56.8	511	500	477	450	416	379	337	291	250	189	76
60.6	549	538	519	500	477	443	405	360	314	265	208

Centrifugal Pumps

For today's machinery and tomorrow's demands, Hypro centrifugal pumps lead the industry! Pump capabilities range up to 440 gpm and 190 psi. With the largest selection of models, Hypro allows you to match the right pump to your equipment and task. Use Hypro centrifugal pumps for chemical spraying and transfer applications.

The broad, versatile line includes models with rugged housings of cast iron, stainless steel and polypropylene that stand up to strong chemical herbicides. Stainless steel pumps are ideal for use with Roundup® or other acid applications. Polypropylene pumps are lightweight and provide excellent resistance to corrosive chemicals. Choose from gear, pedestal, flange, DC clutch, hydraulic motor and belt drives, as well as models that are closed-coupled to gasoline engines.



All of the Hypro centrifugal pumps share these quality features:

- Compatible with corrosive, abrasive and general use chemicals
- Models with high volume (440 gpm), high pressure (190 psi) capabilities
- Nylon, polypropylene, or GTX impellers on most models
- Hydraulically-driven models feature high-efficiency, cast-iron hydraulic motor
- Hydraulic motor equipped with proprietary double-lip Teflon seals
- Life Guard® silicon carbide mechanical seals standard on all stainless steel pumps and available in select cast iron and polypropylene models
- Viton mechanical seals standard on cast iron and polypropylene models
- Standard shafts are stainless steel
- Stainless steel wear ring for extended life on cast iron models
- Hydraulically-driven pumps are max performance tested using proprietary software

