
Menu

# FOAMKIT TXFOAM

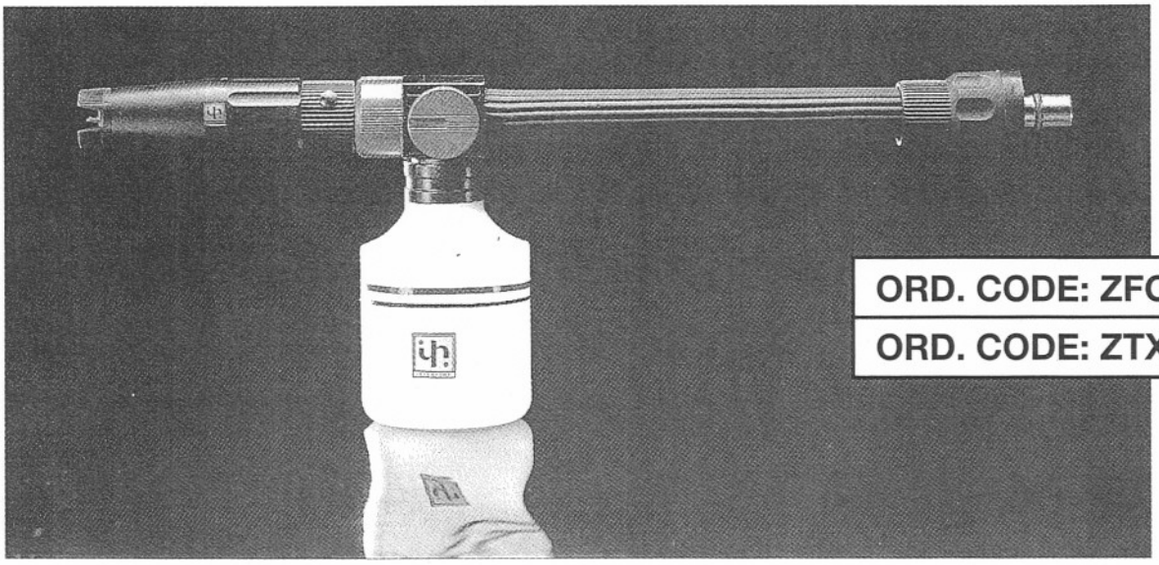

**ORD. CODE: ZFOAMKIT**

**ORD. CODE: ZTXFOAM**

## FEATURES

- ADJUSTABLE SPRAY NOZZLE
- FILTERED CHEMICAL BOTTLE
- RUST PROOF CONSTRUCTION
- QUICK DISCONNECT LANCE FITTING
- CHEMICAL RESISTANT MATERIALS

## SPECIFICATIONS

| | FOAMKIT | TXFOAM |
|---|---|---|
| MAX PRESS.: | PSI1450-bar100-Mpa10 | PSI3600-bar250-Mpa25 |
| MAX. FLOW: | G.P.M.(US) 3.96-l/min 15 | G.P.M.(US) 4.50-l/min 17 |
| MAX. TEMP.: | 140°F - 60°C | 140°F - 60°C |
| WEIGHT: | lbs. 1 - Kg 0,45 | lbs. 1.12 - Kg 0,51 |
| LENGTH: | ft. 1.34 - mm 410 | ft. 1.75 - mm 535 |
| INLET: | M27x2 (HOBBY) | M22x1,5 (PROFESSIONAL) |


| FOAMKIT (FOR HOBBY) | |
|---|---|
| TYPE | SUITABLE FOR: |
| FOAMKIT 0 | X161 - BOXJET/QUIKY 19 - TURBO 10/100-19 |
| FOAMKIT 1 | BOXJET/QUIKY 8/70 - 8/90 - 21<br>TURBO 8/70 - 8/90 - 21<br>X·117 - X·220 - X·230 - X·240 - F·122 - F·124<br>CLEANMATIC CL10-CL11-CL22-CL24-CL26<br>GREENJET GX10-GX11-GX22-GX24-GX26<br>BLUETIME BT10-BT11-BT22-BT24-BT26 |
| FOAMKIT 2 | TURBO 11/90 - 15 |
| FOAMKIT 3 | TURBO 11/70 |

| TXFOAM (PROFESSIONAL) | |
|---|---|
| TYPE | SUITABLE FOR: |
| TXFOAM 0 | T 10.100 - TX/TSX/IPX 951 - TX300.14.180<br>TX500.15.200 - TX500.15.250 |
| TXFOAM 1 | T 8.90 - TX/TSX/IPX 10.130<br>TX/TSX/IPX 12.140-TX/TSX/IPX 13.180<br>TX 952 - TX/TSX/IPX 956<br>TX 300.10.130-TX300.13.160 |
| TXFOAM 2 | T 11.120 - TX/TSX/IPX 12.100<br>TX/TSX/IPX 14.120<br>TX/TSX/IPX 15.150 - TX/TSX/IPX 954<br>TX 955 - TX/TSX/IPX 961 - TX500.18.170 |
| TXFOAM 3 | TX500 21.200 - TX500 21.150<br>TX/TSX/IPX 17.130 - TX/TSX/IPX 957 |


## WARNING

① Use proper eye and skin protection.
② Avoid contact with detergent.
③ Do not use harsh chemicals or flammable fluids (know your chemicals).
④ Do not direct spray at yourself or any other person.

# OPERATING INSTRUCTIONS

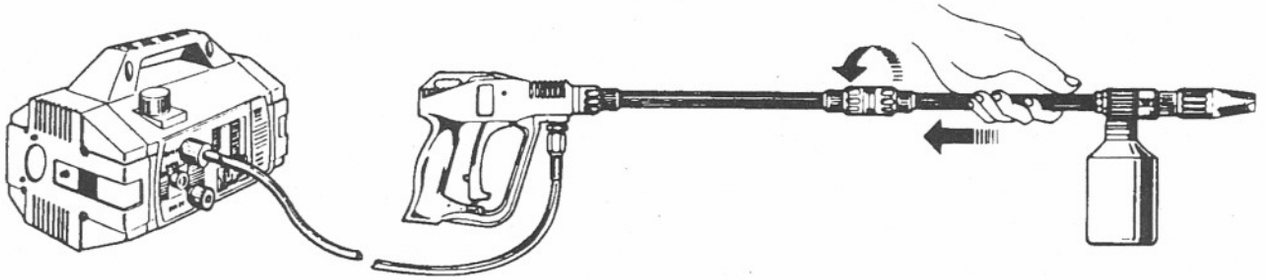

Attach quick disconnect fitting on «FOAMKIT» lance to spray gun.
Fill bottle with chemical to mark shown.
Adjust regulation knob for proper water/chemical ratio per manufacturers recommendations.

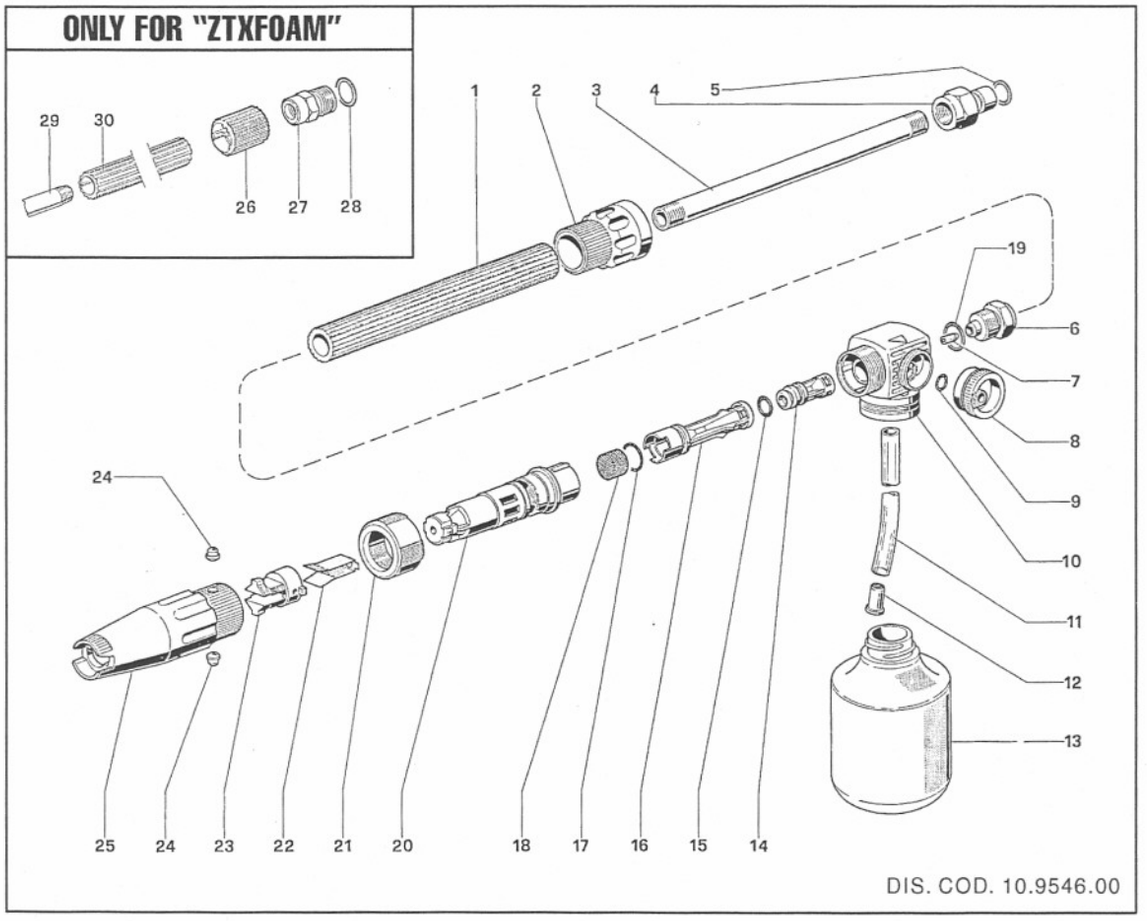


| POS. | CODE CODICE | DESCRIPTION DESCRIZIONE | N. PCS. |
|---|---|---|---|
| 1 | 18.0106.98 | Impugnatura - Quick 2 | 1 |
| 2 | 10.0295.51 | Ghiera | 1 |
| 3 | 18.2033.89 | Tubo G 1/4 - Quick 2 | 1 |
| 4 | 10.0297.70 | Innesto maschio | 1 |
| 5 | 90.3820.00 | OR Ø 9.13x2.62 - Spec. | 1 |
| 6 | 10.0291.70 | Nipplo | 1 |
| 7 | 98.6674.00 | Ugello Cod. 140 - Type 1 | 1 |
| | 98.6690.00 | Ugello Cod. 145 - Type 0 | 1 |
| | 98.6780.00 | Ugello Cod. 160 - Type 2 | 1 |
| | 98.6915.00 | Ugello Cod. 170 - Type 3 | 1 |
| 8 | 10.0289.51 | Pomolo di regolazione | 1 |
| 9 | 90.3574.00 | OR Ø 6.07x1.78 | 1 |
| 10 | 10.0288.51 | Corpo | 1 |
| 11 | 10.0292.98 | Tubo Ø 7x10 - P.V.C. | 1 |
| 12 | 92.8914.00 | Filtro | 1 |
| 13 | 10.0276.51 | Contenitore det. 500 c.c. | 1 |
| 14 | 10.0285.51 | Tubo venturi detergente | 1 |
| 15 | 90.3580.00 | OR Ø 8.73x1.78 - Spec. | 1 |

| POS. | CODE CODICE | DESCRIPTION DESCRIZIONE | N. PCS. |
|---|---|---|---|
| 16 | 10.0286.51 | Tubo venturi aria | 1 |
| 17 | 90.3589.00 | OR Ø 12.42x1.78 | 1 |
| 18 | 10.0270.36 | Pastiglia filtro Ø 15x10 | 1 |
| 19 | 90.3593.00 | OR Ø 15.60x1.78 | 1 |
| 20 | 10.0290.51 | Cilindro | 1 |
| 21 | 92.9836.00 | Galletto M 28x1.5 | 1 |
| 22 | 10.0304.76 | Lame di guida | 1 |
| 23 | 10.0299.51 | Pinza | 1 |
| 24 | 98.1916.00 | Tappo Ø 6 | 2 |
| 25 | 10.0300.51 | Manopola di regolazione | 1 |
| | | **ZTXFOAM** | |
| 26 | 10.0542 .51 | Protezione | 1 |
| 27 | ZINA 1/4 F | Nipplo 1/4 F - M 22x1.5 | 1 |
| 28 | 90.3845.00 | OR Ø 18.72x2.62 | 1 |
| 29 | 18.0127.89 | Tubo G 1/4 - QUICK 35 | 1 |
| 30 | 18.0126.98 | Impugnatura - QUICK 35 | 1 |

Revisione N° 5

Cod. 10.0367.03 - 07/08 - 1.000 De Pietri