DUAL-BOOM

- ✓ **360° rotation**
- ✓ **polished stainless steel**
- ✓ **tough design**
- ✓ **self lubricated ball bearing**
- ✓ **high quality swivels included**
- ✓ **insulated high pressure hose or insulated high pressure pipe**
- ✓ **hose protection / tension relief**
- ✓ **ready to use**

Technical Data


Pressure	275 bar (27.5 MPa)	
Temperature	120°C	
Inlet (top & side)	G1/4" F	(or on request)
Outlet	G1/4" M	(or on request)
Throughput medium	pH 3 - 12	

When using high and low pressure, we recommend to set the low pressure on the upper boom.




DDP

Part No.	L1	L2	L3	Weight
67.403	1450	1600	-	18.6kg
67.413	1600	1750	-	18.9kg
67.423	1750	1900	-	19.2kg
67.433	1900	2050	-	19.5kg
67.443	2050	2250	-	19.8kg
67.453	2250	2500	-	21.1kg

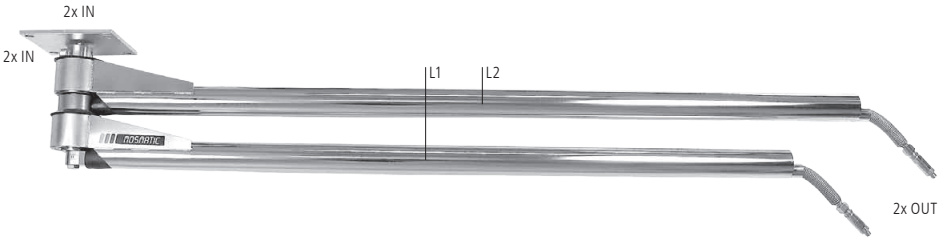


DDF (with flex-arm)

Part No.	L1	L2	L3	Weight
63.403	1450	1600	-	18.9kg
63.413	1600	1750	-	18.8kg
63.423	1750	1900	-	19.3kg
63.433	1900	2050	-	20.5kg
63.443	2050	2250	-	22.3kg
63.453	2250	2500	-	23.5kg

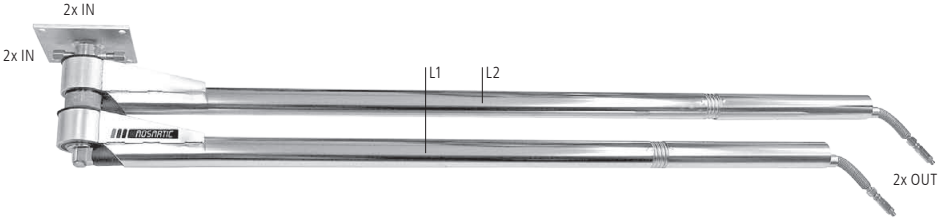

DP3


Part No.	L1	L2	L3	Weight
69.402	1200	1450	1600	28.6kg
69.412	1450	1600	1750	28.9kg
69.422	1600	1750	1900	29.2kg
69.432	1750	1900	2050	29.5kg
69.442	1850	2050	2250	29.8kg
69.452	2000	2250	2500	30.1kg

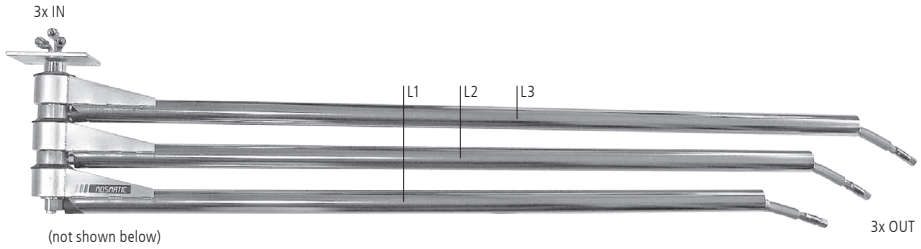

(not shown below)


DDK (hexagon shape)

Part No.	L1	L2	L3	Weight
64.021	1450	1600	-	19.2kg
64.001	1600	1750	-	19.5kg

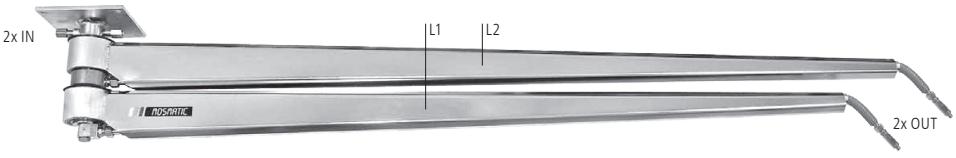



Accessories see page 71

Ceiling Mounting Plate



Bearable load for each bore at least 30'000 N (for example M12 screw)

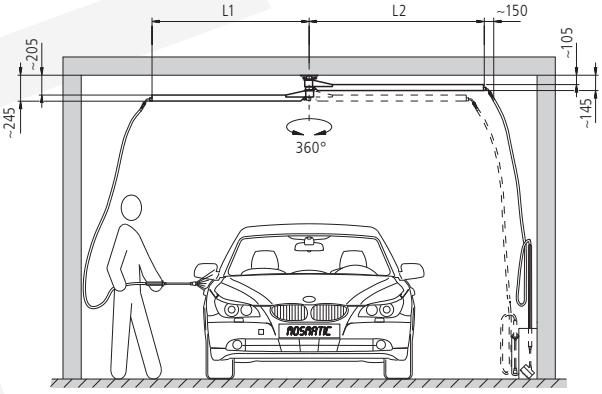

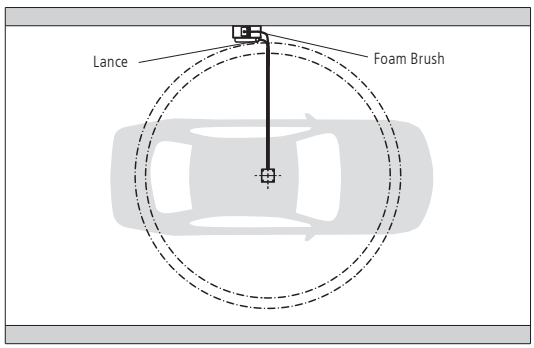

Legend

M.. = metric thrust, **..M =** male, **F =** female, **G =** gas pipe thrust, **QV =** quick connects, **SV =** profile ring fitting
D = diameter, **k =** conical, **L =** length, **NW =** nominal width, **SW =** wrench size, **IN =** media input, **OUT =** media output, **RS =** basic position

BRITISH