WALL-BOOM

- ✓ **180° rotation**
- ✓ **polished stainless steel**
- ✓ **tough design**
- ✓ **self lubricated ball bearing**
- ✓ **high quality swivels included**
- ✓ **insulated high pressure hose or insulated high pressure pipe**
- ✓ **hose protection / tension relief**
- ✓ **ready to use**

Technical Data

Pressure	275 bar (27.5 MPa)	
Temperature	120°C	
Inlet (top)	G1/4" F	(or on request)
Outlet	G1/4" M	(or on request)
Throughput medium	pH 3 - 12	



WAE

Part No.	L1	L2	Weight
68.502	1450	-	10.2kg
68.512	1600	-	10.9kg
68.522	1750	-	11.6kg
68.532	1900	-	12.3kg
68.542	2050	-	13.0kg
68.552	2250	-	13.7kg
68.562	2500	-	14.9kg
68.572	2750	-	16.1kg
68.582	3000	-	17.3kg

WAD


Part No.	L1	L2	Weight
61.402	1450	1600	19.1kg
61.412	1600	1750	19.9kg
61.422	1750	1900	20.7kg
61.432	1900	2050	21.5kg
61.442	2050	2250	22.4kg
61.452	2250	2500	23.6kg

WAN

Part No.	L1	RS	Weight
60.001	2000	links	8.6kg
60.002	2000	ohne	8.6kg
60.003	2000	rechts	8.6kg
60.021	2500	links	11.3kg
60.022	2500	ohne	11.3kg
60.023	2500	rechts	11.3kg

Accessories see page 71




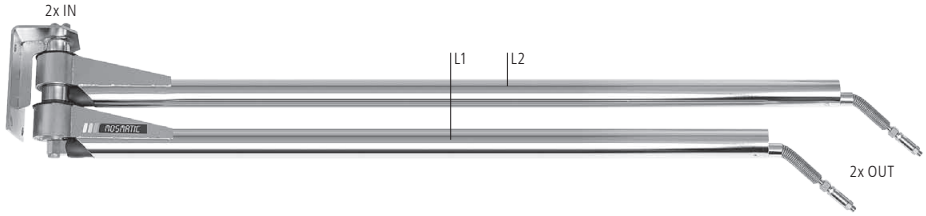




Wall-Boom available with different park positions.
w/o (neutral), left or right. Detail (front view), see chart.


Wall Mounting Plate WAN




Wall Mounting Plate WAD/WAE



Bearable load for each bore at least 30'000 N (for example M12 screw)

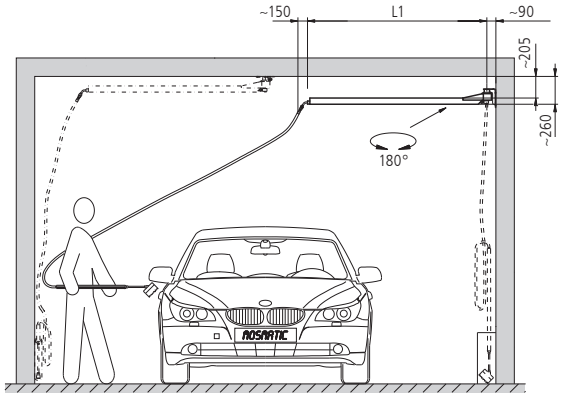

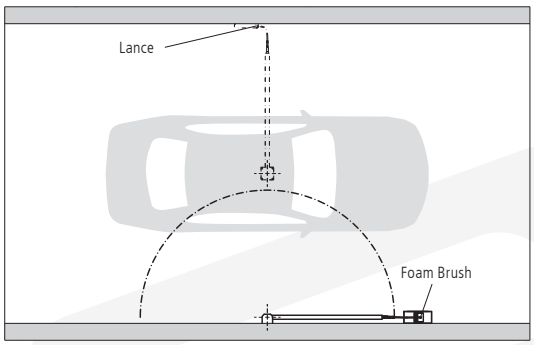

Legend

M.. = metric thrust, **..M =** male, **F =** female, **G =** gas pipe thrust, **QV =** quick connects, **SV =** profile ring fitting
D = diameter, **k =** conical, **L =** length, **NW =** nominal width, **SW =** wrench size, **IN =** media input, **OUT =** media output, **RS =** basic position