
Menu

Pratissoli **ACCESSORIES**

A15


ACCUMULATORI ANTIPULSAZIONI

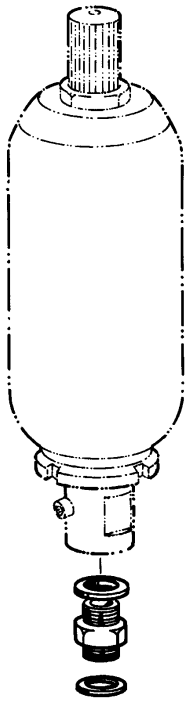

CARATTERISTICHE - *SPECIFICATIONS*	
Capacità - *Volume*	1,5 lt.
Pressione max esercizio *Max working pressure*	330 bar - *4780 psi*
Pressione di precarica *Setting pressure*	60% della pressione di esercizio *60% of the working pressione*
Attacco - *Connection*	3/4" G
Peso - Weight	7,1 Kg.

QUALITA' MATERIALI - *MATERIAL QUALITY*	
Corpo - *Shell*	Forgiato FE 82 *forged steel*
Saccca - *Bladder*	gomma nitrilica (perbunan) *nitrile rubber (perbunan)*

DIMENSIONI - *DIMENSIONS*					
A	**B**	**C**	**D**	**E**	**F**
(mm.)				**(mm.)**	
355	**114**	**3/4"**	**5/8" UNF**	**47**	**55**

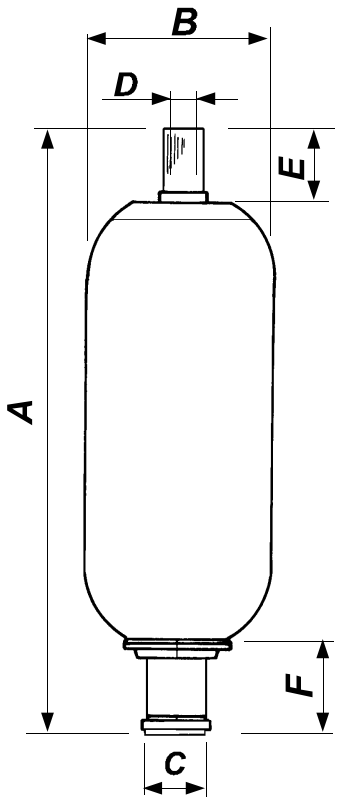

FORNITURA - *SUPPLY*

- **L'accumulatore viene fornito precaricato al 60% della pressione di lavoro della pompa (da indicare all'ordine). Il nipplo 3/4" G M/M e relative rondelle sono compresi nella fonitura.**

◊***The nitrogen pressure is already set at 60% of the working pressure of the pump which should be indicated when ordering. The nipple 3/4"G M/M and washers are included in the supply.***

PRATISSOLI POMPE Division of **INTERPUMP GROUP S.p.A.**
via F. Cavallotti 33 - 42100 REGGIO EMILIA - ITALY
E-mail: pratissoli@interpumpgroup.it
Tel. +39 0522 276511 - Fax +39 0522 511140

I dati sono indicativi e non impegnativi, la ditta si riserva di variarli in ogni momento.
The data are indicative and not binding. We reserve the right to modify them at any time.