
Menu

Pratissoli ACCESSORIES

F40 FILTRO - INLET FILTER

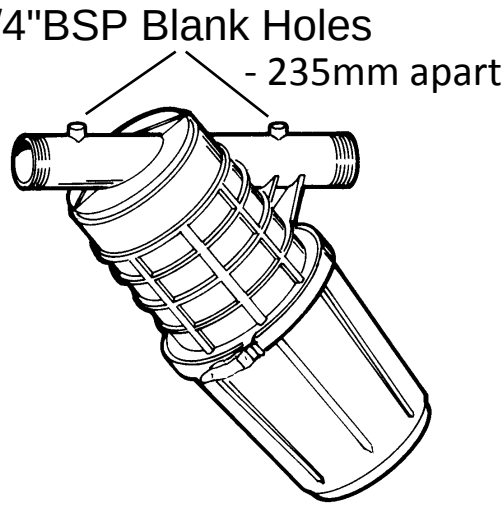

Filtro per linee aspirazione in polipropilene.
Il cestello, facilmente smontabile mediante collare a ganci, contiene la cartuccia filtrante in acciaio inox a 50 mesh (360 microns).
E' dotato di presa inferiore per l'eventuale montaggio di un rubinetto di scarico.
Sono disponibili gradi di filtrazione diversi (vedi tab.cartucce).

Water inlet filter made of polypropilene.
It features a stainless steel cartridge at *50 mesh (360 microns) filtration degree.*
A threaded hole (plugged) is provided at the bottom of the filter housing for installation of a drain valve.
Other filtration degrees are available (see cartridge chart

CARATTERISTICHE - *SPECIFICATION*		
Portata max	450 l/m - 120 *GPM*	
Pressione max	8 bar - *120 psi*	
Area effettiva - *Effective area*		
50 mesh	464 c.q.	71.6 sq. in.
100 mesh	424 c.q.	65.7 sq.in.
PESO - *WEIGHT*	3.00 Kg.	

TAB. CARTUCCE - *CARTRIDGE CHART*	
Tipo - *Type*	cod.
50 mesh - 365 microns	8213.0152.5
100 mesh - 173 microns	8213.0152.6

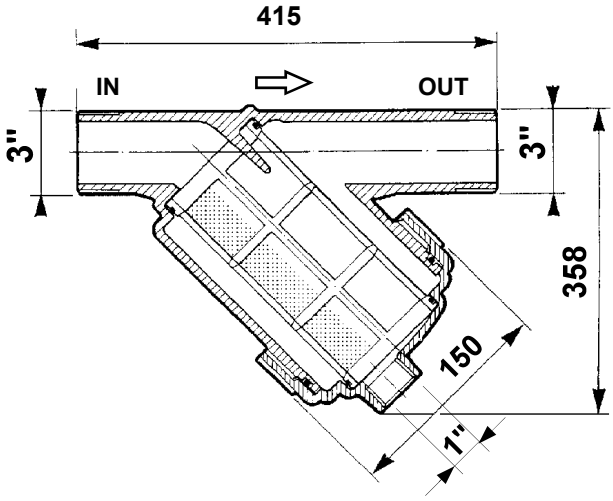


TABELLA CONVERSIONE MESH - MICRON
CONVERSION CHART MESH - MICRONS

MESH	MICRONS	MESH	MICRONS
18	980	80	209
32	594	100	173
40	500	120	134
50	365	150	96

PRATISSOLI POMPE division of **INTERPUMP GROUP S.p.A.**
via F. Cavallotti 33 - 42100 REGGIO EMILIA - ITALY
E-mail: pratissoli@interpumpgroup.it
Tel. (0522) 276511 - Fax (0522) 511140

I dati sono indicativi e non impegnativi, la ditta si riserva di variarli in ogni momento.
The data are indicative and not binding. We reserve the right to modify them at any time.