DIESEL OIL TRANSFER GROUP 12 OR 24 V - 80 L/MIN

Technical characteristics :


- Self priming vane pump with by-pass
- Ø suction 1''1/4
- Ø discharge 1''
- Pump body in cast iron
- Pump cover and impeller in steel
- Impeller blades and by pass valve in POM plastic
- Max flowrate : 80 l/min*
- Motor case in galvanized steel
- D.C.
- Insulation class F
- Protection IP 55
- 12 V or 24 V
- 400 W, 3000 RPM



PS 80-12 V
PS 80-24 V



PS KIT BAT 80-12 V
PS KIT BAT 80-24 V

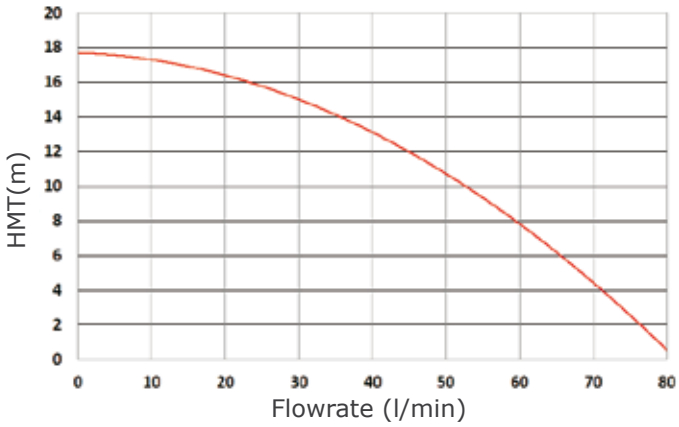



KIT BAT 80-12 V
KIT BAT 80-24 V

12 OR 24 V - 80 L/MIN*

CODE	REF	DESIGNATION / EQUIPMENT
138021	PS 12V-80L	Self-priming 12 V or 24 V 80 l/min* vane pump with by-pass.
138102	PS 24 V-80L	
138016	PS KIT BAT 80-12 V	Portable diesel oil transfer group with PS 12 V or 24 V 80 l/min* pump with by-pass, cable and battery clamps.
138097	PS KIT BAT 80-24V	
138017	KIT BAT 12V 80L	Portable diesel oil transfer group 12 or 24V 80 l/min* with self-priming vane pump with by-pass. 4 m UR/FIOUL antistatic discharge hose with crimped brass connections Ø 25 mm, aluminium manual nozzle PIST UR 6000, cable and battery clamps.
138098	KIT BAT 24V 80L	

*the indicated flowrate is the nominal flowrate at the pump outlet (pump alone, without equipment)