
Menu

Pratissoli **ACCESSORIES**

A4X inox


ACCUMULATORE ANTIPULSAZIONI
PULSATION DAMPENER

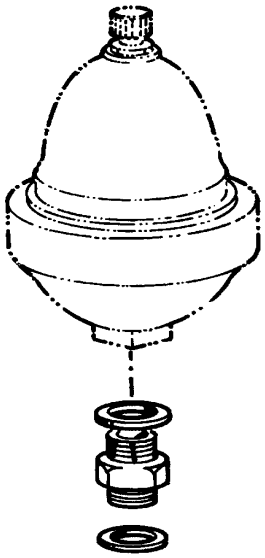

CARATTERISTICHE - *SPECIFICATIONS*	
Capacità - *Volume*	0.35 lt.
Pressione max esercizio *Max working pressure*	210 bar - 3050 *psi*
Pressione di precarica *Setting pressure*	60% della pressione di esercizio *60% of the working pressione*
Attacco - *Connection*	M18 x 1,5
Peso - Weight	2,8 Kg.

QUALITA' MATERIALI - *MATERIAL QUALITY*	
Corpo - *Shell*	Inox AISI 316 *s.s.*
Membrana - *Bladder*	gomma nitrilica - *nitrile rubber*

DIMENSIONI - *DIMENSIONS*			
A	**B**	**C**	**D**
(mm.)			
160	**97**	**M18 x1,5**	**5/8" UNF**

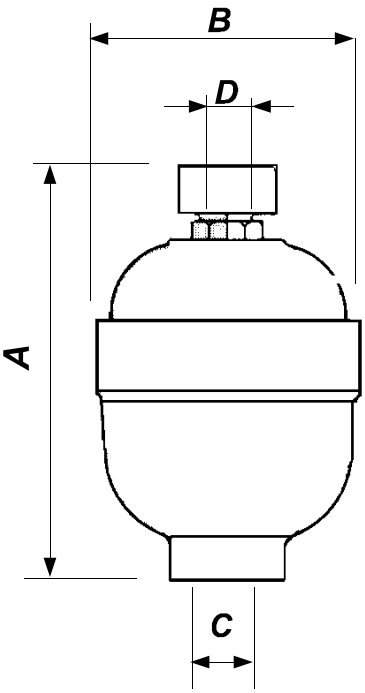

FORNITURA - *SUPPLY*

- **L'accumulatore viene fornito precaricato al 60% della pressione di lavoro della pompa (da indicare all'ordine). Il nipplo M18 x 1,5 - 1/2" G M/M e relative rondelle sono compresi nella fonitura.**

◊***The nitrogen pressure is already set at 60% of the working pressure of the pump which should be indicated when ordering. The nipple M18 x 1,5 - 1/2" and washers are included in the supply.***

PRATISSOLI POMPE Division of **INTERPUMP GROUP S.p.A.**
via F. Cavallotti 33 - 42100 REGGIO EMILIA - ITALY
E-mail: pratissoli@interpumpgroup.it
Tel. +39 0522 276511 - Fax +39 0522 511140

I dati sono indicativi e non impegnativi, la ditta si riserva di variarli in ogni momento.
The data are indicative and not binding. We reserve the right to modify them at any time.